

Configuring your phone

You can configure the IP phone via LCD menu or web user interface.

*Default username and password are admin/admin for web page.

Network Settings

- Press the Menu(OK)>System Settings>Advanced Settings(Default password is empty, press OK to enter)>Network>IP Settings. Select your network type: Static IP/ DHCP/ PPPoE.
- Choose STATIC press Navigation key - to the next, see the IP address settings, the IP and gateway settings and other related network information. Entry "." use the key of "*", then confirm.
- Select PPPoE username and password to register.
- Select DHCP needn't to setting IP.

Account Settings

- Press the Menu(OK) > System Settings > Advanced Settings(Default password is empty, press OK button to enter) > SIP > SIP Accounts > Select the SIP Line > configure your necessary parameters, such as username, password and sip server address.
- Type the IP address of your SIP server (you can type "." by "*" button, you must confirm the connection between the phone and SIP server), And then select Submit changes, and press OK button to submit the changes.

Placing a call

You can pick up the handset or press Headset/ Speaker button to place a call.

- Dial directly: Dial number directly, then press # button or Send soft-key (it will call from the first available line);
- Redial: Press Redial button/soft-key to dial the latest number;
- Dial from Call history: Press Menu button, select "Call history" and select one of "Missed calls", "Received calls" and "Dialed numbers" lists to dial by pressing Dial soft-key.
- You can open Call history in standby status of phone by pressing corresponding Navigation-

buttons, for example , Left button : "Received Calls" list ; Right button : "Dialed Numbers" list ; Down button : "Missed Calls" list . UP button : "all calls" ; "OK" button to confirm the key ; next to the "C" key for the Cancel button.

MPL Settings

- MPL(Mobile Phone Line), dock your mobile phone as a line.
- Step1: Enable/disable MPL, press Menu(OK) > System Settings > Advanced Settings(Default password is empty, press OK button to enter) > MPL .
- Step2: Change the SIP line account model as "MPL". Press the Menu(OK) > System Settings > Advanced Settings(Default password is empty, press OK button to enter) > SIP > SIP Accounts, press OK button to submit the changes.
- Step3: Turn on your mobile phone's Bluetooth feature, find the bluetooth list e.g "016B0A-U3S" and make connection.Default password is "0000", you can change it in the web. And then you can use MPL line to make a call or conference or transfer.

EP+ APP Settings


- You can download the Android/IOS EP+ APP by scanning the QR code below. After EP+ APP installed, you can follow the first installation guide to operate:
A)Mobile phone need to be connected to LAN by using WIFI.
B)Using EP+ APP to scan/manually input the IP Phone MAC code.
C)Find the EP+ APP password from IP Phone's LCD menu or WEB. LCD: Press C > View Status > EP+ Password. WEB: Login WEB > Phone Setting > EP+. And then input the password into the EP+ APP.
D)Press Login button.
Note: EP+ setting mode default is automatic. For more information, refer to EP+ user manual.

*For more information, refer to the User Guide or Configure via web user interface

UNIVOIS

Connect Your Phones

Univois IP Phone U3S

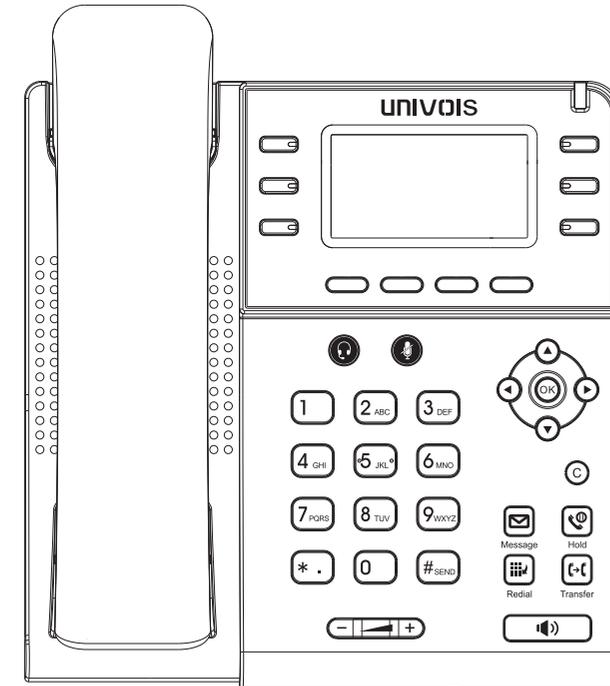

UNIVOIS (CHINA)

UNIVOIS LIMITED

Tel: (86)20-82320720

E-mail: sales@univois.com

Web:www.univois.com


Quick User Guide

www.univois.com

Applies to firmware version V1.0.1 or later.

Packaging contents


The following items are included in your package, if you find anything missing, contact your system administrator.

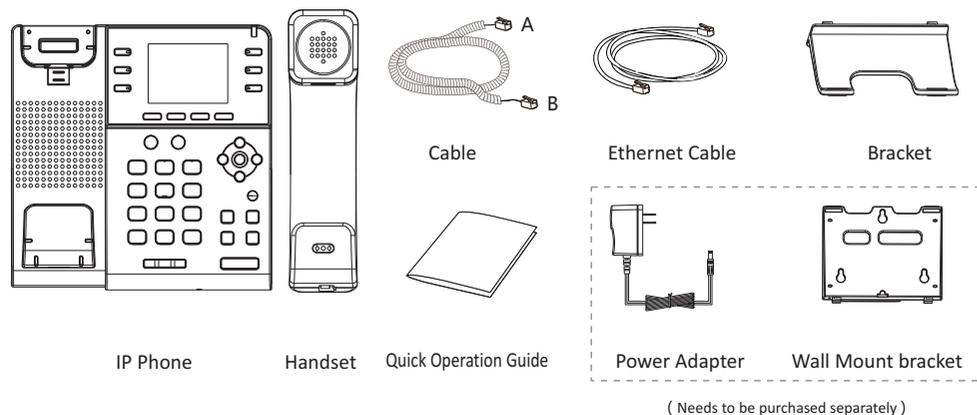

Note: The cable install method is short A connect the handset, longer B connect the IP phone.


Hardware introduction

The main hardware components of the phone include the display and keyboard, as shown below:

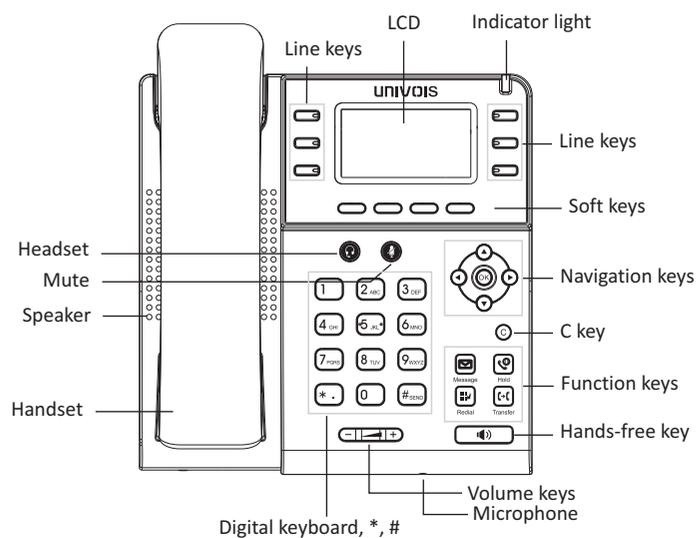


Socket/Jack connection

The instructions for each port of the phone are as follows:

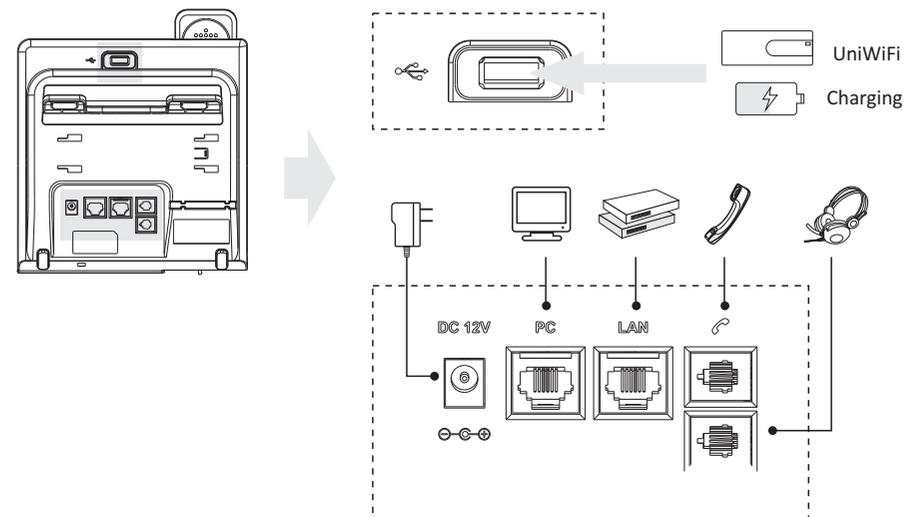

Assembling the Phone

Attach the bracket as shown below:

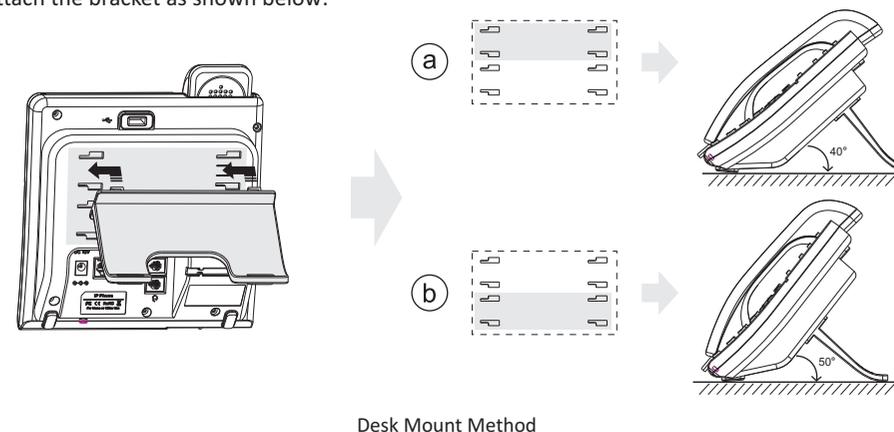

Note: You can also mount the phone to a wall, you need to buy wall mount bracket separately.